



ULTIMATE
LIFTING SOLUTIONS

TEL: 01384 986 026
WWW.ULSLIFTING.COM




S T A N D A R D L I N E I S I N N O V A T I O N B Y A L M I

AL33

INFRA STANDARDLINE

AL33D

The Standardline, where the cutting height can be set by means of two spindles, has been the trusted ALMI block splitter since the 1970s. In the past, this line was produced in the well-known ALMI yellow. Nowadays this line is also provided with an electrolytically galvanised surface, which means that it is damaged less quickly and has an even longer service life. As with the Easyline, the Standardline block splitters are also equipped with support plates with measure and angle indicator. This makes working with ALMI block splitters even easier.

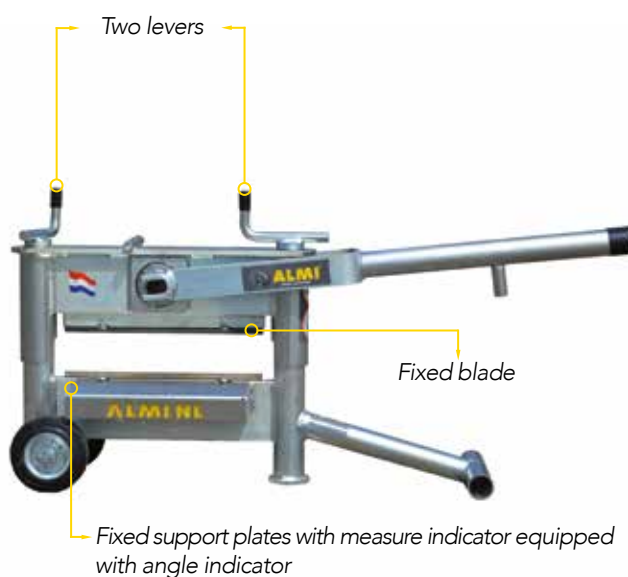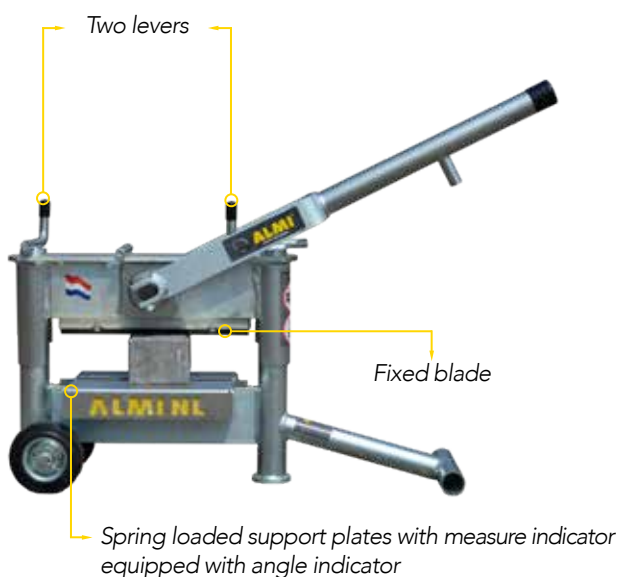

TECHNICAL SPECIFICATIONS **AL33**

Suitable for	pavers, concrete pavers, clay pavers and granite
Advantage	the original from Almi
Cutting width	330 mm
Cutting height	10 - 120 mm
Blades	can be used on 4 sides

Weight	41 kg
Application	straight and angled (90° - 45°)

TECHNICAL SPECIFICATIONS **AL33D**

Suitable for	pavers, concrete pavers, clay pavers and granite
Advantage	precise paving due to angled splitting
Cutting width	330 mm
Cutting height	10 - 120 mm
Blades	can be used on 4 sides

Weight	41 kg
Application	straight and angled (90° - 45°)