


**TR 225 N Standard equipment**

- ✓ Work positioning lever
- ✓ IP67 plug
- ✓ Trolley available for use with a gantry
- ✓ Upper limit safety device
- ✓ Self-braking motor with magnetic device
- ✓ Bracket can be extended up to 1120mm

**IMER Hoist with telescopic frame-capacity 200 kg**

**Applications**

The low noise level allows working without causing noise harmful to the operator's health and bothersome to others.

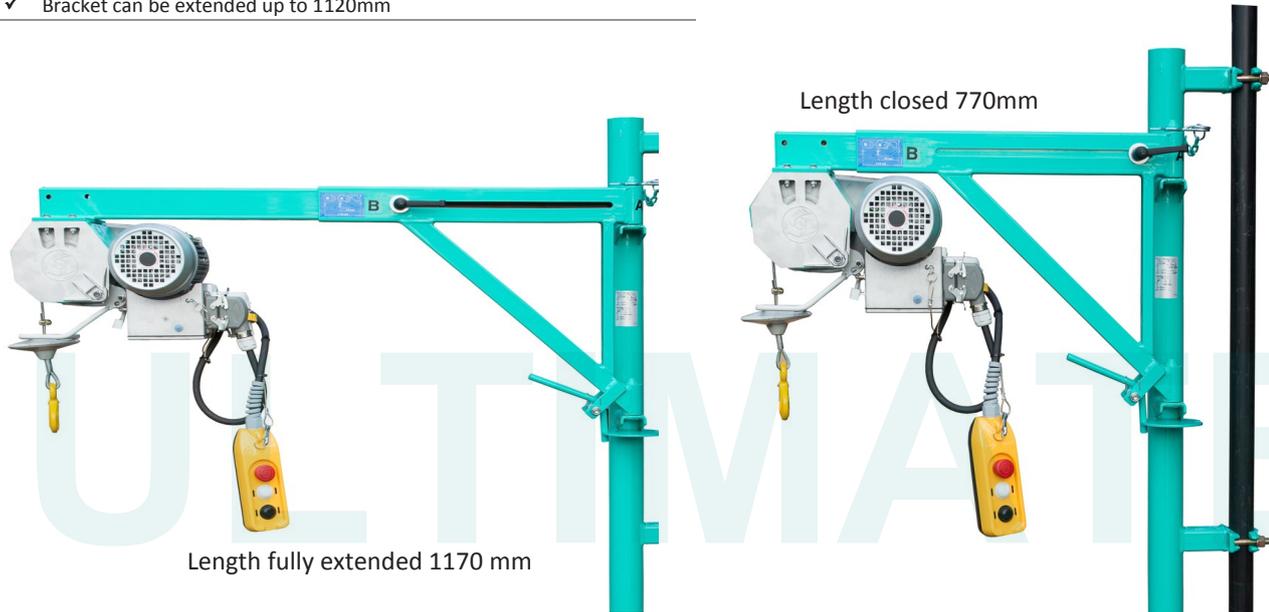

Length fully extended 1170 mm

Length closed 770mm



**UPPER LIMIT SAFETY DEVICE**

All hoists are fitted with upper limit safety device with positive drive by thrust spring that stops the upward movement of the load in the highest point.

**ARS DEVICE (ANTI REWINDING SYSTEM)**

Models TR 225 N, TR 225 VN are fitted with the ARS device. This exclusive, lever/limit switch patented by Imer prevents reversing of the rope winding on the drum and keeps the machine damage-free.

<b>110V/50HZ</b>	<b>230V/50HZ</b>
<b>MOTOR AVAILABLE</b>	
<b>✓ TR 225 N</b>	

		TR 225N
Maximum capacity	kg	200
Av. full load lifting speed min/max	m/min	19
Max. working height	m	30
Ø wire rope	mm	5
Rope length	m	30
Motor power rate 230V/50Hz 110V/50Hz	kW	0.75
Motor speed	rpm	1360/1380
Running current	A	14/7.2
Machine weight	kg	44/46
SPL in operator's position	dB(A)	<70
Dimensions w/l closed (open) /h	mm	330/770(1170)/520
Packing dimensions w/l/h	mm	350/820/500



**ULTIMATE LIFTING SOLUTIONS**

**TEL: 01384 986 026**  
**WWW.ULSLIFTING.COM**