




Features

- » Universally applicable as end stop or mobile limitation of the trolley.
- » Easy and quick to install without drilling or welding.
- » Suitable for all DELTA manual- and electric trolleys up to 10 ton from this catalog.
- » Suitable for most I- and H-beam profiles up to 25mm beam thickness.
- » Complies with the Machinery Directive 2006/42/EC. Supplied with CE declaration of conformity and assembly instructions.

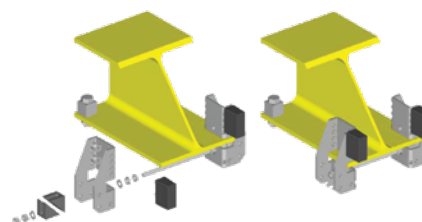

Specifications			
Article code	Suitable beam width	Net weight	Length of threaded rod
	mm	kg	mm
DHST.006	82-300	2.5	370

Specifications			
Hoist capacity	Max. permitted weight of hoisting equipment		Max. permitted speed
ton		kg	m/min
< 2		160	25
2		250	20
3		250	20
4		250	20
5		400	20
6		400	20
8		900	16
10		900	16



ULTIMATE
LIFTING SOLUTIONS

TEL: 01384 986 026
WWW.ULSLIFTING.COM